



Lithium Battery CR1220 Data-Sheet



Designation IEC: **CR1220**

Nominal voltage: **3V**


Designed capacity: **45 mAh**

Typical capacity: **40 mAh**
(load 62kΩ down to 3.0V at 20°C)

Weight: **0.75 g**

Dimensions (max): **12.2 x 1.2 mm**

Temperature ranges: **long-term storage: ..40°C**
application/discharge: -20..60°C

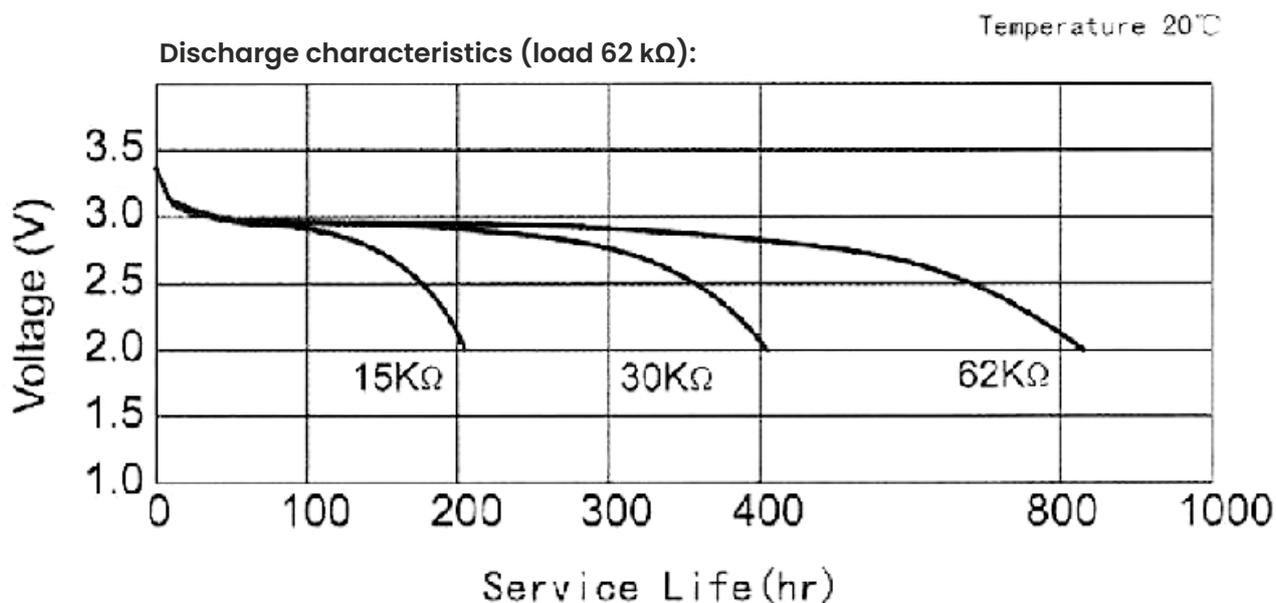

Baltrade sp. z o. o.

Geodetów 24
80-298 Gdansk, Poland
VAT EU: PL5840202116
WEEE: E0006872WBW

tel: +48 58 556 43 44
fax: +48 58 552-20-20
www.baltrade.eu
contact@baltrade.eu



Place, date of issue: Gdansk, 04.02.2025