



## Lithium Battery CR 1616 Data-Sheet



Designation IEC: **CR1616**

Nominal voltage: **3V**

Designed capacity: **55 mAh**

Typical capacity: **50 mAh**  
(load 47kΩ down to 2.0V at 20°C)

Weight: **1.1 g**


Dimensions: **16 x 1.6 mm**

Temperature ranges:  
**long-term storage: 0..40°C**  
**application/discharge: -20..60°C**

### Discharge characteristics (load 47 kΩ):

load: 47KΩ

end-point voltage: 2.0V

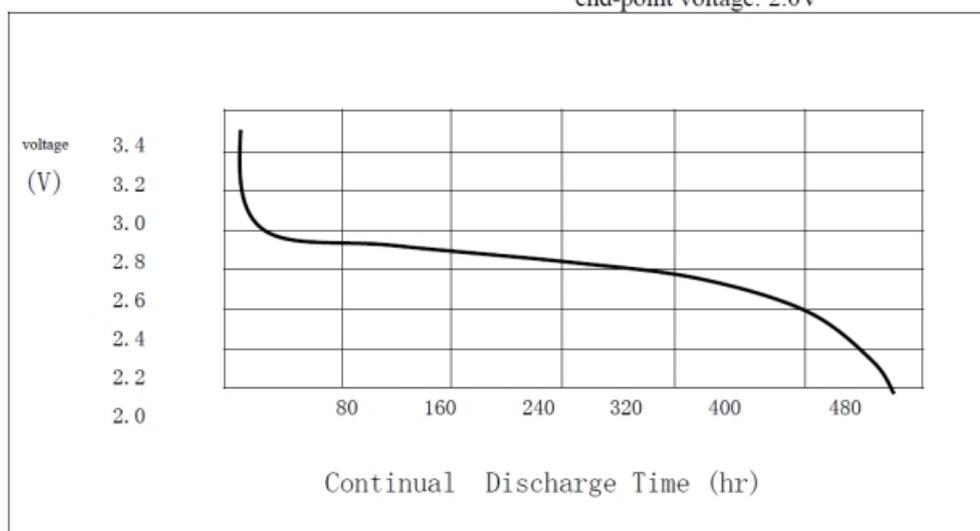

**Baltrade** sp. z o. o.

Geodetów 24  
80-298 Gdansk, Poland  
VAT EU: PL5840202116  
WEEE: E0006872WBW

tel: +48 58 556 43 44  
fax: +48 58 552-20-20  
www.baltrade.eu  
contact@baltrade.eu



Place, date of issue: Gdansk, 04.02.2025