



Lithium Battery CR2430 Data-Sheet



Designation IEC: **CR2430**

Nominal voltage: **3V**

Designed capacity: **310 mAh**


Typical capacity: **300 mAh**
(load 15Ω down to 2.0V at 20°C)

Weiingt: **4.2 g**

Dimensions (max): **24.5 x 3.0 mm**

Temperature ranges: **long-term storage: ..40°C**
application/discharge: -20..60°C

Discharge characteristics (load 15 kΩ):

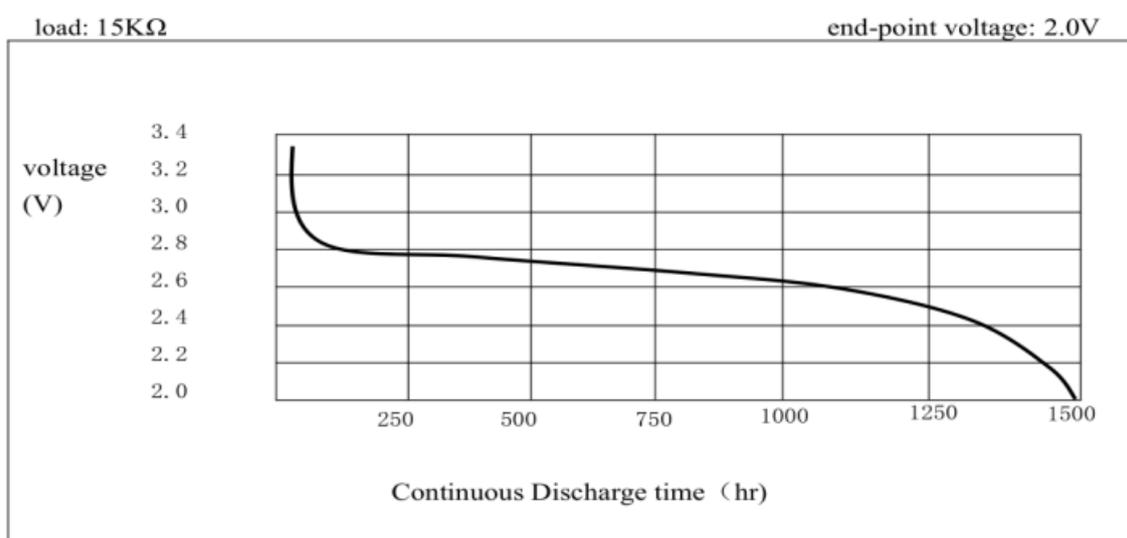

Baltrade sp. z o. o.

Geodetów 24
80-298 Gdansk, Poland
VAT EU: PL5840202116
WEEE: E0006872WBW

tel: +48 58 556 43 44
fax: +48 58 552-20-20
www.baltrade.eu
contact@baltrade.eu



Place, date of issue: Gdansk, 04.02.2025