



Lithium Battery CR2477 Data-Sheet



Designation IEC: **CR2477**

Nominal voltage: **3V**

Designed capacity: **820 mAh**

Typical capacity: **800 mAh**
(load 4.7Ω down to 2.0V at 20°C)

Weight: **8.5 g**


Dimensions (max): **24.5 x 7.7 mm**

Temperature ranges: **long-term storage: ..40°C**
application/discharge: -20..60°C

Discharge characteristics (load 4,7 k Ω):

load: 4.7K Ω

end-point voltage: 2.0V

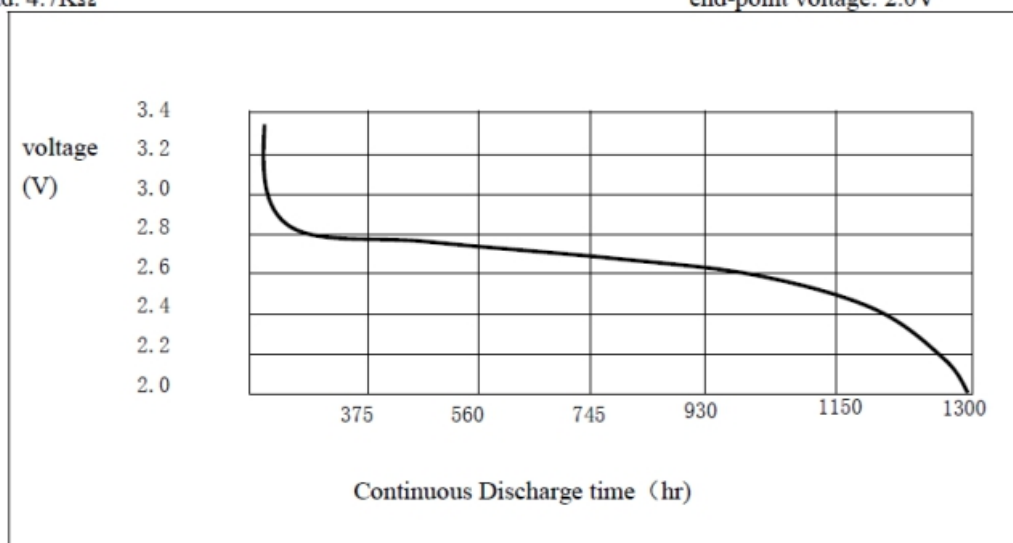

Baltrade sp. z o. o.

Geodetów 24
80-298 Gdansk, Poland
VAT EU: PL5840202116
WEEE: E0006872WBW

tel: +48 58 556 43 44
fax: +48 58 552-20-20
www.baltrade.eu
contact@baltrade.eu



Place, date of issue: Gdansk, 04.02.2025