



5 903205 773159

Lithium Battery CR3032 Data-Sheet



Designation IEC: **CR3032**

Nominal voltage: **3V**

Designed capacity: **600 mAh**

Typical capacity: **580 mAh**
(load 7.5Ω down to 2.0V at 20°C)

Weight: **6.3 g**


Dimensions (max): **30.0 x 3.2 mm**

Temperature ranges: **long-term storage: ..40°C**
application/discharge: -20..60°C

Voltage (V)

Discharge characteristics (load 7,5 kΩ):

RD: 7.5KΩ

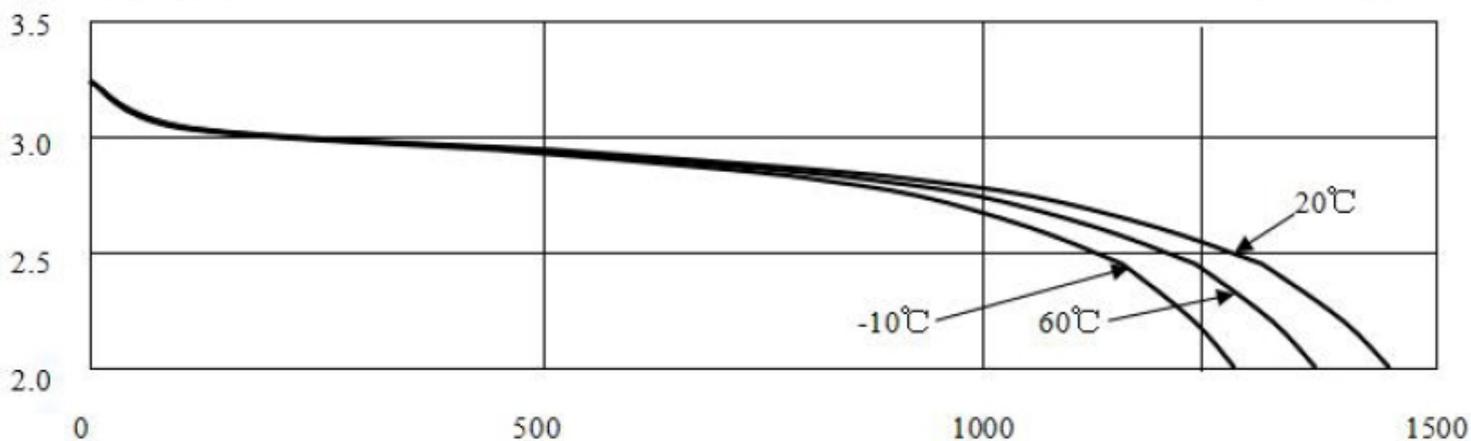

Discharge Time (Hours)

Baltrade sp. z o. o.

Geodetów 24
80-298 Gdansk, Poland
VAT EU: PL5840202116
WEEE: E0006872WBW

tel: +48 58 556 43 44
fax: +48 58 552-20-20
www.baltrade.eu
contact@baltrade.eu



Place, date of issue: Gdansk, 04.02.2025