




Ni-MH "Ready to Use" Rechargeable Battery R6 AA 2000 mAh

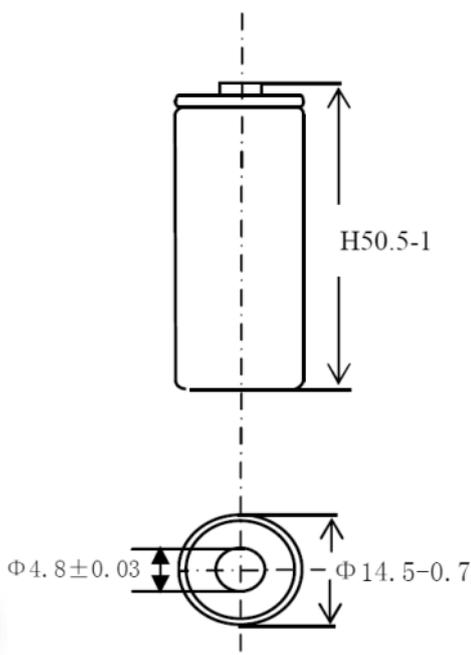

Designation IEC: **HRL6**

Nominal voltage: **1.2V**

Designed capacity: **2000mAh**

Typical capacity:
1900mAh (IEC 61951-2, 7.3.2)

Cycle life: **>700 according to IEC standard**

Standard charge: **190 mA / 16 h**

Internal impedance:
≤35 mΩ (fully charged)


Weight: **27 g**

Dimensions: **50.5 x 14.5 mm**

Temperature ranges:
long-term storage: -20..35°C
application/discharge: -20..50°C
charge: 0..45°C

Voltage (V)

Discharge characteristics (load 0.2C – 380 mA):

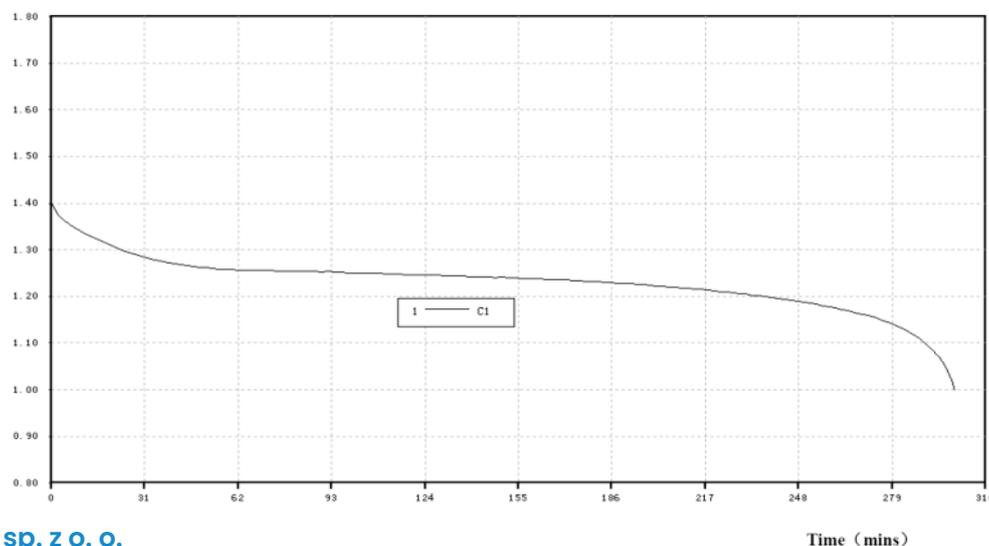

Baltrade sp. z o. o.

Geodetów 24
80-298 Gdansk, Poland
VAT EU: PL5840202116
WEEE: E0006872WBW

tel: +48 58 556 43 44
fax: +48 58 552-20-20
www.baltrade.eu
contact@baltrade.eu



Place, date of issue: Gdansk, 04.02.2025