




Alkaline Battery LR6 AA 'Industrial Alkaline'

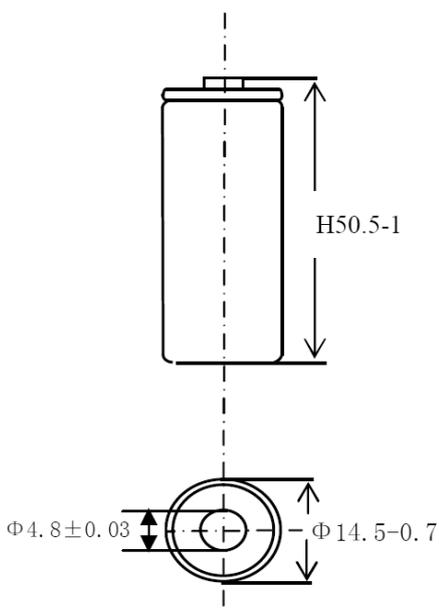

Designation IEC: **LR6**

Nominal voltage: **1.5V**

Designed capacity: **2700 mAh**
(discharge with high resistance)

Shelf life: **5 years**

Weight: **22 g**

Dimensions (max): **50.5x14.5 mm**

Temperature ranges: **long-term storage: 10..35°C**
application/discharge: -10..50°C

Approved standards: **GB/T 8897.2-2013,**
GB 8897.5-2013, GB8897.5:IEC 60086-
1:2011, IEC 60086-2:2011, IEC 60086-3:2011,
IEC 60086-5:2011

Typical service output (new battery, at 20°C):

Load	Conditions	End Voltage	Time
43Ω	4 h/d	0.9V	82 h
3.9Ω	1 h/d	0.8V	7 h 10 min.
3.9Ω	24 h/d	0.9V	6 h

Baltrade sp. z o. o.

Geodetów 24
80-298 Gdansk, Poland
VAT EU: PL5840202116
WEEE: E0006872WBW

tel: +48 58 556 43 44
fax: +48 58 552-20-20
www.baltrade.eu
contact@baltrade.eu



Place, date of issue: Gdansk, 04.02.2025