




## 'Pro Alkaline' High Performance Battery LR20 1.5V

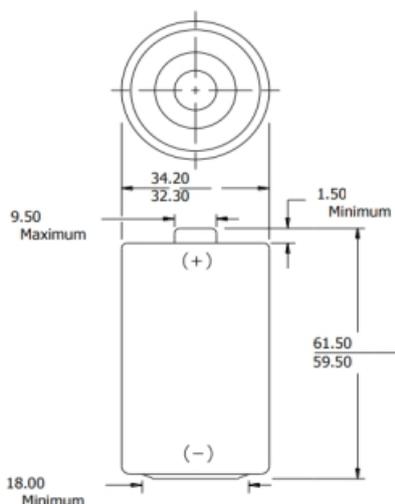

Designation IEC: **LR20**

Nominal voltage: **1.5V**

Designed capacity: **17500 mAh**  
(discharge with high resistance)

Shelf life: **10 years**

Weight: **142 g**

Dimensions (max): **34.2x 61.5 mm**

Temperature ranges: **long-term storage: 10..35°C**  
**application/discharge: -10..40°C**

Approved standards: **GB/T 8897.2,**  
**GB 8897.5, IEC 60086-1,**  
**IEC 60086-2, IEC 60086-3, IEC 60086-5**

Typical service output (new battery, at 25°C):

Load	Conditions	End Voltage	Time
2.2Ω	1 h/d	0.8V	25 h
10Ω	4 h/d	0.9V	130 h
600mAh	2 h/d	0.9V	15 h

**Baltrade** sp. z o. o.

Geodetów 24  
80-298 Gdansk, Poland  
VAT EU: PL5840202116  
WEEE: E0006872WBW

tel: +48 58 556 43 44  
fax: +48 58 552-20-20  
www.baltrade.eu  
contact@baltrade.eu



Place, date of issue: Gdansk, 04.02.2025