




'Pro Alkaline' High Performance Battery LR6 AA

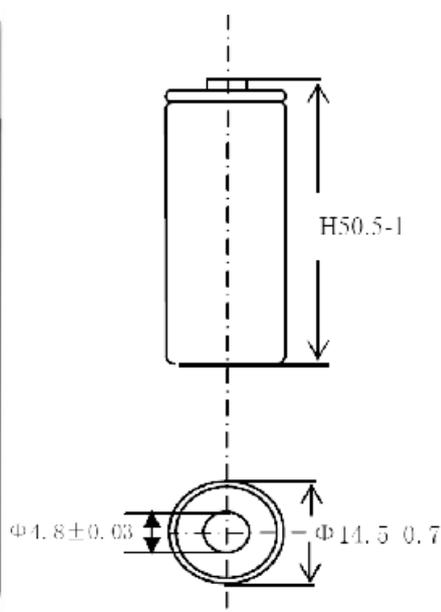

Designation IEC: **LR6**

Nominal voltage: **1.5V**

Designed capacity: **3000mAh**
(discharge with high resistance)

Shelf life: **10 years**

Weight: **23.2 g**

Dimensions (max): **50.5 x 14.5 mm**

Temperature ranges: **long-term storage: 10..25°C**
application/discharge: -20..60°C

Approved standards: **GB/T 8897.2,**
GB 8897.5, IEC 60086-1,
IEC 60086-2, IEC 60086-3, IEC 60086-5

Typical service output (new battery, at 22°C):

Load	Conditions	End Voltage	Time
43Ω	4 h/d	0.9V	93 h
24Ω	15 s/m., 8 h/d	1.0V	48 h 30 min.
3.9Ω	1 h/d	0.8V	8 h 30 min.
3.9Ω	24 h/d	0.9V	6 h 50 min.

Baltrade sp. z o. o.

Geodetów 24
80-298 Gdansk, Poland
VAT EU: PL5840202116
WEEE: E0006872WBW

tel: +48 58 556 43 44
fax: +48 58 552-20-20
www.baltrade.eu
contact@baltrade.eu



Place, date of issue: Gdansk, 04.02.2025